

IH SERIES FILTER HOUSINGS

A variety of IH series filter housings are available. A sample of one of the housings is shown below.

For other size options, please do not hesitate in contacting us;

IH SERIES – 6,7 & 8 CARTRIDGE FILTER HOUSING

Suitable for gaseous product applications.

Secure quick release with clamped flange.

Max operating pressure 10 bar.g.

Max operating temperature and flow rates as per cartridge specifications.

Recommended max flow 756 lpm (DN80).

Stainless steel 304 construction.

External glass bead blast standard.


EPDM gaskets standard. Others on request.

DIN11851 male end connections standard. Others on request.

Optional extra – vent & drain valves and pressure gauge.

Suitable for DO and 222 cartridge connections.

Adaptable for all cartridge lengths (e.g. 9", 19" & 29").

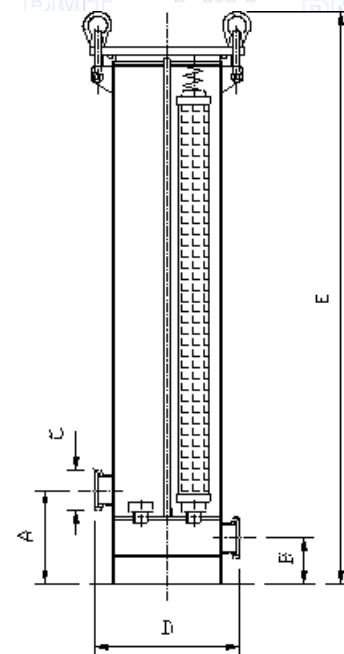

CARTRIDGE LENGTH	DIMENSIONS (mm)					MASS
	A	B	C	D	E	Kg
10"	190	100	DIN 11851 DN65 & 80	325	585	
20"	190	100	DN65 & 80	325	842	
30"	190	100	DN65 & 80	325	1,100	
40"	190	100	DN65 & 80	325	1,352	

IH 4 ▽ □ Δ 65G IH 4 ▽ □ Δ 80G (6 & 7 Cart. = DN 65, 8 Cart. = DN 80)

▽ = 6 6 Cartridge □ = 1 10" Δ = DO DOE
 7 7 Cartridge 2 20" TC 222 / Flat (O-Ring & Cap)
 8 8 Cartridge 3 30" TF 222 / Fin (O-Ring & Fin)
 4 40"

