


SINGLE

Home

Up

ITH SERIES	- SINGLE	CARTRIDGE	FILTER	HOUSING
------------	----------	-----------	--------	---------

- Suitable for gaseous product applications
- Secure clamped housing
- Max operating pressure 10 bar.g
- Max operating temperature as per cartridge specifications
- Max flow rate 94.5 litres per minute
- Stainless steel 304 standard with high external polish. Others on request
- Stainless steel tripod. Removable and 2 position
- DIN 11851 male end connection standard. Others on request
- EPDM gaskets standard. Others on request
- Optional extra - vent valve and pressure gauge
- Adaptable for all cartridge lengths (e.g. 9", 19" & 29")

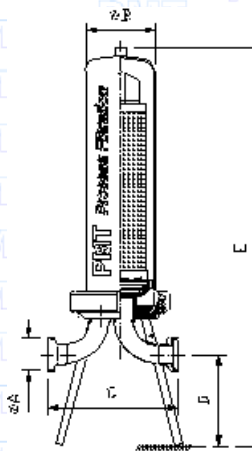

CARTRIDGE LENGTH	DIMENSION (mm)					MASS kg
	A DIN11851	B N	C	D	E DOE	
10'	25	104	228	142	573	5.67
20'	25	104	228	142	823	6.95
30'	25	104	228	142	1,073	8.25
40'	25	104	228	142	1,323	9.55