


MULTIPLE



# DATA SHEET

## ITH SERIES - THREE CARTRIDGE FILTER HOUSING

- Suitable for gaseous product applications.
- Secure quick release with flanged clamping.
- Max operating pressure 10.0 bar.
- Max operating temperature and flow rates as per cartridge specifications. Recommended max flow 284 lpm.
- Stainless steel stand.
- External glass bead blast standard. Other finishes on request.
- SS 304 and SS 316 optional materials.
- EPDM gaskets standard. Others on request.
- DIN 11851 end connections standard. Others on request.
- Optional extra - vent valve and pressure gauge.
- Adaptable for all cartridge lengths. (e.g. 9", 19" & 29")

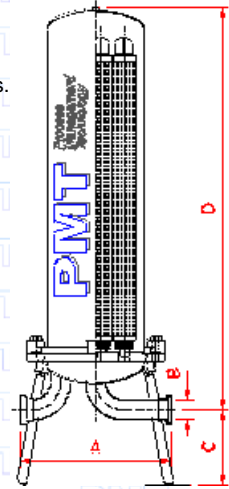

CARTRIDGE LENGTH	DIMENSION (mm)				MASS
	A	B DIN1851	C	D	kg
10'	336	DN40	210	511	27.1
20'	336	DN40	210	768	296
30'	336	DN40	210	1026	321
40'	336	DN40	210	1278	34.6